


## SOT-23 Plastic-Encapsulate Transistors

### Features

- For general amplification
- Complimentary to 2SD601A.
- PNP Transistors

### MECHANICAL DATA

- Case style:SOT-23molded plastic
- Mounting position:any

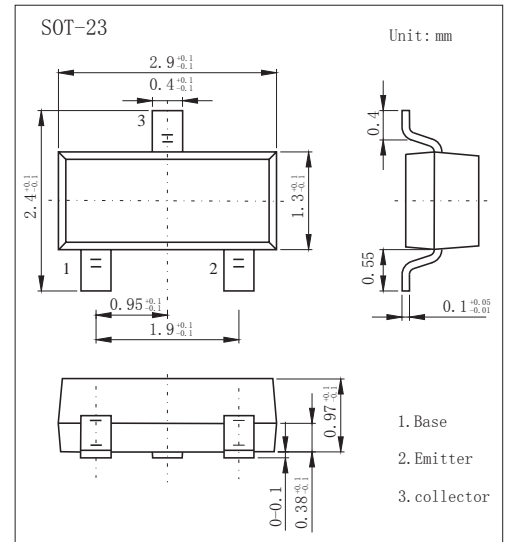

## MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V <sub>CB0</sub>	-45	V
Collector - Emitter Voltage	V <sub>CEO</sub>	-45	
Emitter - Base Voltage	V <sub>EBO</sub>	-7	
Collector Current - Continuous	I <sub>c</sub>	-100	mA
Collector Power Dissipation	P <sub>c</sub>	200	mW
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature range	T <sub>stg</sub>	-55 to 150	

### PACKAGE INFORMATION

Device	Package	Shipping
2SB709A	SOT-23	3000/Tape&Reel

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V <sub>CB0</sub>	I <sub>c</sub> = -100 μA, I <sub>E</sub> =0	-45			V
Collector- emitter breakdown voltage	V <sub>CEO</sub>	I <sub>c</sub> = -2 mA, I <sub>B</sub> =0	-45			
Emitter - base breakdown voltage	V <sub>EBO</sub>	I <sub>E</sub> = -100 μA, I <sub>C</sub> =0	-7			
Collector-base cut-off current	I <sub>CB0</sub>	V <sub>CB</sub> = -40 V, I <sub>E</sub> =0			-0.1	μA
Collector-Emitter cut-off current	I <sub>CEO</sub>	V <sub>CE</sub> = -20 V, I <sub>B</sub> =0			-100	
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = -6V, I <sub>C</sub> =0			-0.1	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =-100 mA, I <sub>B</sub> =-10mA			-0.5	V
Base - emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> =-100 mA, I <sub>B</sub> =-10mA			-1.2	
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> = -10V, I <sub>C</sub> = -2mA	160		460	
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> = -10V, I <sub>E</sub> = 0,f=1MHz			2.7	pF
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = -10V, I <sub>C</sub> = -1mA,f=200MHz	60			MHz

### Classification of h<sub>FE</sub>

Type	2SB709A- Q	2SB709A- R	2SB709A- S
Range	160-260	210-340	290-460
Marking	BQ1	BR1	BS1

# RATINGS AND CHARACTERISTIC CURVES

## ■ Typical Characteristics

